
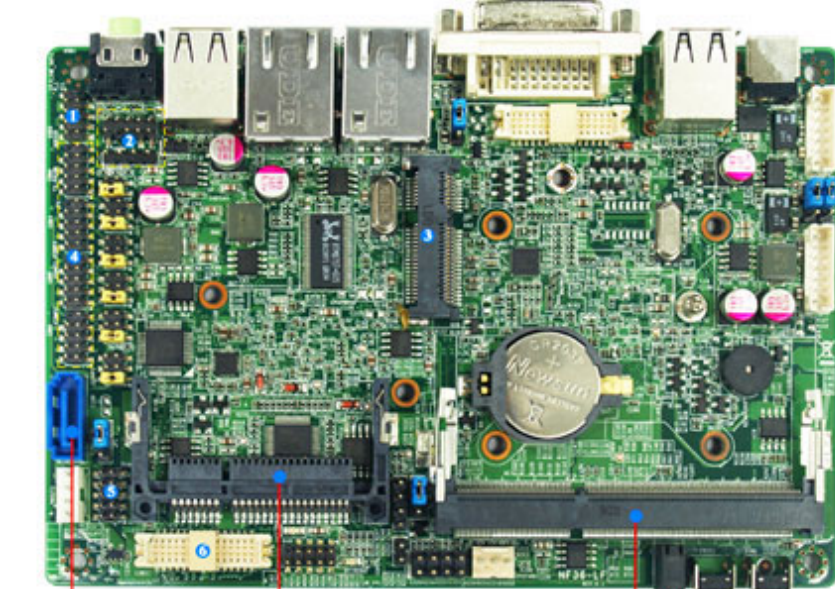


194.00 EUR
incl. 19% VAT, plus [shipping](#)

- Fanless !
- 1.6 Ghz !
- Dual LAN !
- Cedar Trail-M

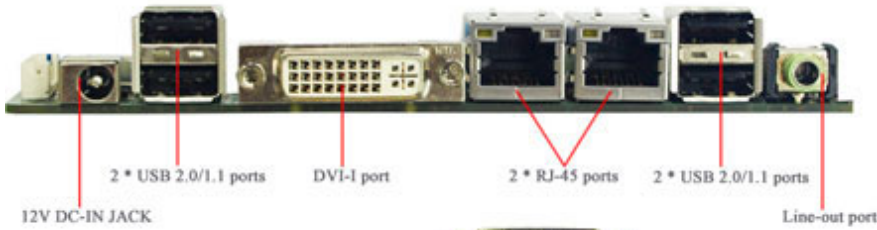

- 1 * Serial ATAIII 3Gb/s connectors
- CF card reader socket
- 1 * SODIMM Sockets for un-buffered Single Channel 64-bit DDR3
- 1 * Audio header
- 2 * USB 2.0 headers
- 1 * MINI PCI-E
- 4 * COM header(COM2-4 for RS232,COM1 for RS232/422/485)
- 24-bit dual channel LVDS connector

Fanless PC barebone (you need RAM+HDD/SSD for a full pc).

Because of its size (152.6 x 110 x 34.8 mm ! 0.6 liters !) the system is perfect for these applications :

- POS
- Digital Signage
- Kiosk

Or use as attractive office-computer or server.

With a stabilized 12V adapter you also can use the barebone in a vehicle.

| | |
|------------------------|---|
| CPU | INTEL® Cedar Trail-M Processor N2600 (1.6GHz) (integrated) [Fanless cooling !] |
| Chipset | INTEL®NM10 Express chipset |
| Internal drive | - 1x 2.5" interner Schacht für HDD/SSD - 1x interner CompactFlash-slot |
| RAM | 1x SO-DDR-III RAM internal slot (2GB max) |
| Audio | Realtek ALC662 4-Chanel Audio CODEC |
| Power | 12VDC Power consumption 20W |
| Features | - Watchdog Timer - Integrated WLAN (802.11 b/g/n) with antenna [Atheros AR9285] - Dual Gigabit LAN (Realtek RTL8111EVL) |
| Internal connectors | - 2x USB 2.0 - Audio - 3x RS232 (12V/5V selectable) - 1x RS232/RS422/RS485 (12V/5V selectable) - 1x 8bit GPIO - 1x Smart Fan - 1x MiniPCI-E (used by WLAN module) |
| Dimensions | 152.6 x 110 x 34.8mm (HxWxD) |
| External connectors | - 1x Line-Out 3.55mm - 4x USB 2.0 - 2x RJ-45 LAN (10/100/1000Mbit) [Realtek RTL8111EVL] - 1x DVI-I (Analog + Digital) - 1x DC Power connector (12V) |
| Scope of supply | - Jetway JBC362F36W-2600-B Barebone |
| | - DriverCD |
| | - Quickstart-Guide |
| | - AC/DC Adapter (100-240VAC, 12VDC/2.5A) + EU power cord |
| | - DVI-DSUB-15 VGA Adapter |
| | - Screws |
| | - Stand |
| | - WLAN antenna |