


569.00 EUR
incl. 19% VAT, plus [shipping](#)

- AMD Ryzen V1605B !
- 2x LAN !
- 4x DP !
- Mini-ITX !

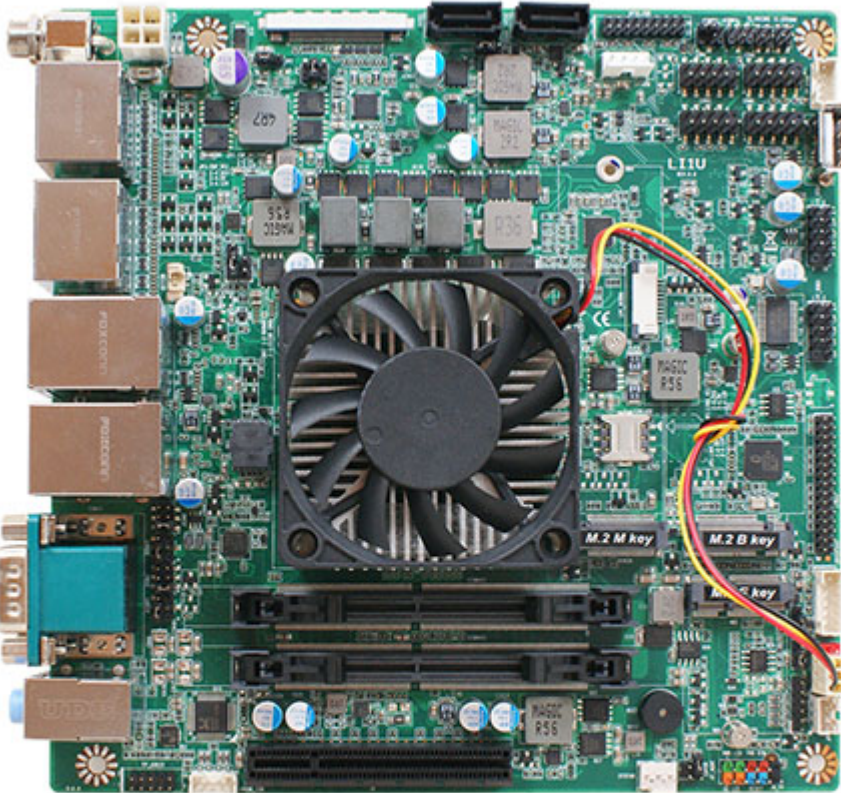

- AMD™ RYZEN™ V1605B 2.0GHz/QC Core Processor
- 2* DDR4 2400MHz up to 32GB
- 2* Realtek® RTL8111H GbE
- 2* SATA III (6Gb/s), 1* M.2 M key (PCIe x2)
- 4* DP(DP0 Co-lay eDP, DP1 Co-lay LVDS)
- 2* RS232/422/485, 4* RS232, 2* USB3.2 (Gen1), 8* USB2.0
- 1* M.2 E key, 1* M.2 B key support 4G/5G Module
- 112~28V DC-in
- MINI ITX Form Factor (170 *170 mm)

| | |
|------------------|---|
| Model | – JLI1U-20 |
| Form Factor | – MINI ITX (170 * 170mm) |
| Processor System | – AMD™ (RYZEN™) Core V1000 Series Processor – V1605B QC, 2.0GHz,15W, Co-lay V1000/R1000 series – AMI 128M Flash ROM |
| Memory | – 2* DDR4 2400MHz SO-DIMM up to 32GB |
| Storage | – 2* SATAIII (6 Gb/s, SATA1 Support SATA DOM) – 1* M.2 M-key (2242/2280, PCI-Ex2) |

| | |
|----------------|---|
| Expansion Slot | <ul style="list-style-type: none"> - 1* M.2 E-key (2230, support WIFI/BT Module) - 1* M.2 B-key (3042/3052, support 4G/5G Module) - 1* PCIe x8 slot - 1* SIM Card Slot (NANO) |
| Ethernet | <ul style="list-style-type: none"> - 2* Realtek® RTL8111H GbE |
| Graphics | <ul style="list-style-type: none"> - AMD™ Vega Core Architecture controller, shared memory - 4* DP1.4 (Max Resolution : 4096x2160@60Hz or 3840x2160@120Hz) - 1* eDP1.4 (Max Resolution : 3840x2160@60Hz, Co-lay DP0) - 1* LVDS (Max Resolution : 2560x1600@60Hz, Co-lay DP1) - Support Four Displays |
| Audio | <ul style="list-style-type: none"> - Realtek® HD Audio - 3W Speaker Amplifier |
| Watchdog Timer | <ul style="list-style-type: none"> - From Super I/O to drag RESETCON# - 256 segments (10sec ~ 255min) |
| Internal I/O | <ul style="list-style-type: none"> - 6* USB2.0 (4* PH2.54, 1* PH2.0, 1* Type A) - 4* RS232 - 2* SATAIII - 3* M.2 (1* M key, 1* E key, 1* B key) - 1* GPIO (16 bit, 5V) - 1* AT mode - 1* I2C/SMBUS - 1* PS2 - 1* Case Open - 1* Speaker |
| External I/O | <ul style="list-style-type: none"> - 4* DP - 2* RJ45 - 2* USB 3.2 (Gen1) - 2* USB2.0 - 2* RS232/422/485 - 1* Audio jack - 12~28V DC-in |
| Power | <p>12~28V DC-in, AT/ATX Supported</p> <ul style="list-style-type: none"> - AT: Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready |
| Compliance | <ul style="list-style-type: none"> - CE, FCC, RoHS, REACH |
| Temperature | <ul style="list-style-type: none"> - Operating: 0°C ~ 60°C - Storage: -20°C ~ 70°C - Humidity: 10% ~ 90% RH @40°C (non-condensing) |
| Warranty | <ul style="list-style-type: none"> - 2 Years Limited Warranty |